

# Wraparound Series

EMBEDDED BRITECOR™ TECHNOLOGY

BWA

AC DIRECT LED  
NO POWER SUPPLY NEEDED



15  
YEAR  
WARRANTY

## APPLICATIONS

Economically designed narrow wraparound provides reliable and efficient lighting. Ideal for use in indoor applications such as homes, modular homes, mobile homes, stores and public building where low glare and ease of installation is required.




## FEATURES & BENEFITS

- BriteCor AC Direct technology - No DC power supply
- Corrosion and scratch resistant
- ETL listed for damp locations
- Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- Diffuser self-aligns and hinges from either side for easy maintenance
- Available in lengths from 24 to 48 inches - (2' & 4' lengths) - 9" nominal width
- Surface, stem or chain mountable
- Optional SmartCor dimming available



## SPECIFICATIONS

Housing and ends are die-formed and embossed from cold rolled steel. Inspection knockouts provided for mounting to junction box. Driver cover snaps into place eliminating the need for tools when accessing. Diffuser hinges from either side in a lift and shift manner and is self-centering. For continuous row mounting. Knockouts are provided for stem mounting. Operating range from -40C to 40C.

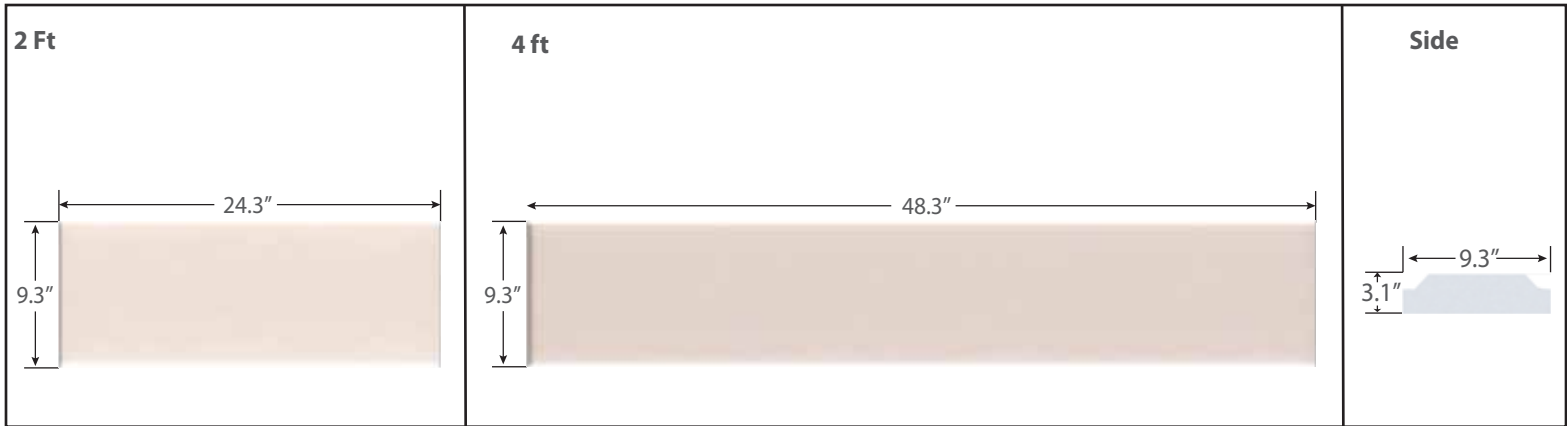

Size	Wattage	Initial Lumens (lm)	Efficacy (lm/W)
2ft	24W	2712	113
2ft	32W	3616	113
4ft	32W	3680	115
4ft	48W	5520	115
4ft	64W	7360	115



## ORDERING INFORMATION

BWA	Length	Wattage	Voltage(V)	Color Temp/CRI(CT80)	Options
2	2 Ft	2 Ft	1	30	Dimmer (Blank) None
4	4 Ft	4 Ft	2	35	SC SmartCor
		24 24 Watts	1D	40	Cable (Blank) None
		32 32 Watts	2D	50	WP6 6' Metal Clad Whip
		48 48 Watts		57	WP12 12' Metal Clad Whip
		64 64 Watts		80	Battery Backup Emergency Light (Blank) None
					EM1 500 Lumen
					EM12 1200 Lumen

EXAMPLE: BWA-2-32-1-4080/SC WP6 EM1

Dimensions and specifications subject to change without notice.

## DLC Listed Models

- BWA-2-32-XD-3080
- BWA-2-32-XD-4080
- BWA-2-32-XD-5080
- BWA-4-64-XD-3080
- BWA-4-64-XD-3580
- BWA-4-64-XD-4080
- BWA-4-64-XD-5080

## Notes:

- Contact factory for dimming options, emergency backup information and any help needed in configuring the light for your application.