

Wraparound Series

EMBEDDED BRITECOR™ TECHNOLOGY

BWA

AC DIRECT LED
NO POWER SUPPLY NEEDED



15
YEAR
WARRANTY

APPLICATIONS

Economically designed narrow wraparound provides reliable and efficient lighting. Ideal for use in indoor applications such as homes, modular homes, mobile homes, stores and public building where low glare and ease of installation is required.



FEATURES & BENEFITS

- BriteCor AC Direct technology - No DC power supply
- Corrosion and scratch resistant
- Nominal 9" width with a shallow design
- Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- Diffuser self-aligns and hinges from either side for easy maintenance
- Available in lengths from 24 to 48 inches - (2' & 4' lengths)
- Surface, stem or chain mountable
- Optional dimming driver




Wraparound Series

BWA

SPECIFICATIONS

Housing and ends are die-formed and embossed from cold rolled steel. Inspection knockouts provided for mounting to junction box. Driver cover snaps into place eliminating the need for tools when accessing. Diffuser hinges from either side in a lift and shift manner and is self-centering. For continuous row mounting. Knockouts are provided for stem mounting.

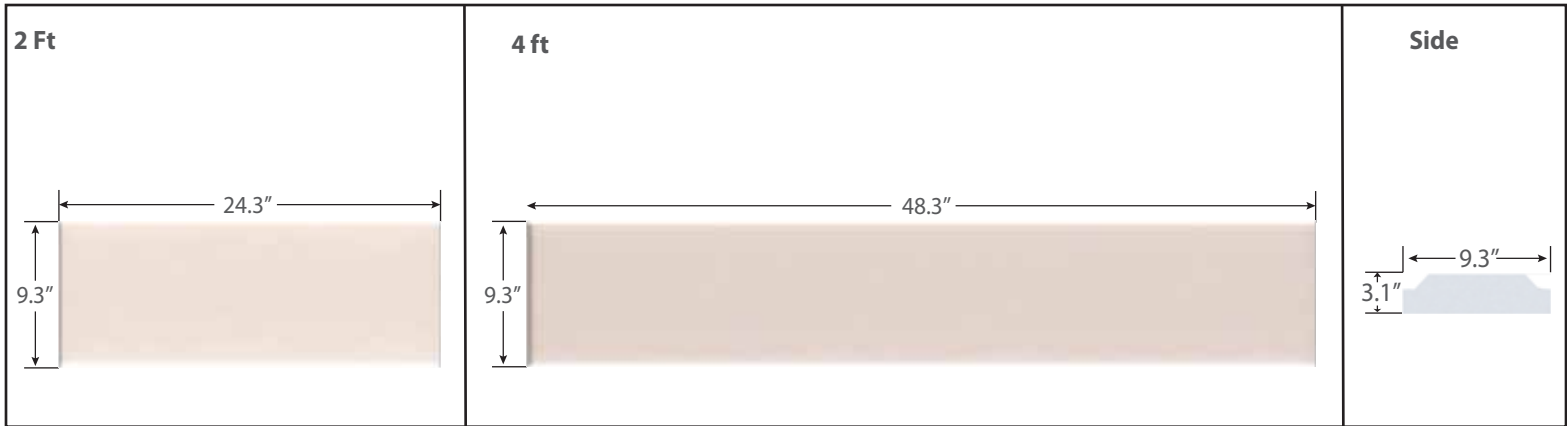

Size	Wattage	Initial Lumens (lm)	Efficacy (lm/W)
2ft	24W	2700	113
2ft	32W	3600	113
4ft	32W	3650	115
4ft	48W	5475	115
4ft	64W	7300	115



ORDERING INFORMATION

BWA	Length	Wattage	Driver Voltage	Color Temp/CRI	Options
2	2 Ft	24	1	30	Dimmer (Blank) None SC SmartCor
4	4 Ft	32	2	35	
		48	1D	40	
		64	2D	50	
				57	
				80	
				90	

Notes: 1.Consult factory for dimming options

EXAMPLE: BWA-2-32-1-4080/SC

Dimensions and specifications subject to change without notice.

DLC Listed Models

- BWA-2-32-XD-3080
- BWA-2-32-XD-4080
- BWA-2-32-XD-5080
- BWA-4-64-XD-3080
- BWA-4-64-XD-4080
- BWA-4-64-XD-5080

Notes:

- Contact factory for dimming options, emergency backup information and any help needed in configuring the light for your application.