

Damp Location Brik Series

Easy Installation – Mounts directly to electrical J-box

BBE2

AC DIRECT LED
NO POWER SUPPLY NEEDED



15
YEAR
WARRANTY



PRODUCT DESCRIPTION :

- BriteCor Adaptive AC Direct – no DC power supply
- 450,000 hours MTBF of continuous operation
- Up to 141 lumens per Watt measured output
- Easily installed – Mounts directly to J-box*
- Constant lifetime lumen output
- Maintenance-free
- Tested and certified to operate in UL damp locations
- Optional polycarbonate front lens available
- SmartCor dimming optional

*J-box not included



Damp Location Brik Series

BBE2

THE BRITECOR™ LIGHT ENGINE TECHNOLOGY

The BriteCor™ Light Engine is a patented Adaptive AC Direct LED Array Technology. Automatically adjusting the redundant LED mesh, BriteCor™ delivers a more efficient and reliable light without a DC power supply.

FEATURES :

- Fixture :** Durable aluminum extrusion housing
- LED Module :** BriteCor™ AC Direct light engine
- Mounting :** Standard J-Box, optional Rotating Mount
- Warranty :** 15 years

ELECTRICAL SPECIFICATIONS :

- Input Voltage :** 120, 277 VAC
- Power Input :** 24, 32 Watts


**CERTIFIED to UL1598
CSA 22.2 No. 250.0-08**




UL File Number: E212547



BRITECOR™ AC DIRECT TECHNOLOGY

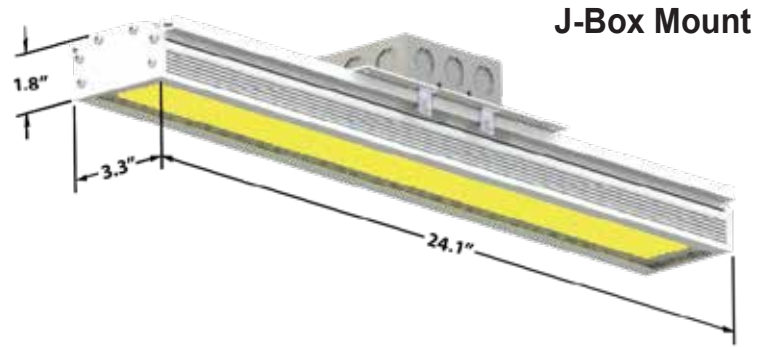

J-Box Mount

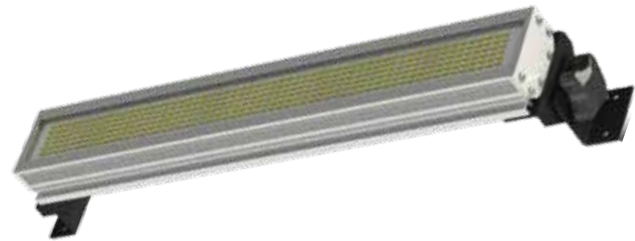

Rotating Bracket Mount

Size	Wattage	Initial Lumens (lm)	Delivered Efficacy (lm/W)
2ft	24	3385	141
2ft	32	4500	141

ORDERING INFORMATION

BBE2 - 424 - XX - V - CT80 - M1 / Options

- Fixture Size**
424 - 4"x24"
- Power**
24 = 24W
32 = 32W
- Voltage**
1 = 120VAC
2 = 277VAC
- Color/CRI**
First 2 - color
30 = 3000K
35 = 3500K
40 = 4000K
50 = 5000K
57 = 5700K
Last 2 - CRI
80 = 80
- Cable Connection**
M1 = Back Mounted
- Options**
 - DIMMER:** (BLANK) Non-Dimming
SC SmartCor Dimmable
 - CABLE LENGTH:** (BLANK) Standard 6 inch length on J-Box Mount
Standard 6 foot length on Rotating Mount
XX is total cable length in feet
 - LENS:** (BLANK) Glass
FR Frosted Glass
SF Safety Film
 - MOUNTING:** (BLANK) Standard J-Box Mount
RB Rotating Bracket Mount

For help with configurations, please contact sales@litesheet.com

EXAMPLE: BBE2-424-32-1-4080-M1/SC C6 SF RB

*Results may change or vary. Product dimensions and specifications are subject to change without notice.