

# Ceiling/Wall Mount Series

EMBEDDED BRITECOR™ TECHNOLOGY

BCM

AC DIRECT LED  
NO POWER SUPPLY NEEDED



**15**  
YEAR  
WARRANTY

## APPLICATIONS



Stylish ceiling/wall mounted luminaire with a variety of LED combinations and sizes enhanced by linear sided acrylic diffuser. Designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, over or beside mirrors, over bulletin boards, in vanities, in displays.




## FEATURES & BENEFITS

- BriteCor AC Direct technology - no DC power supply
- Back plate provided with adequate knockout and mounting holes
- Enhanced by linear sided acrylic diffuser
- Overlapping end caps for uniformity and dimensional stability
- Made in USA
- UL listed for damp locations
- SmartCor dimming optional
- DLC Listed

## SPECIFICATIONS

All metal parts are die formed from heavy gauge cold rolled steel with overlapping end caps. Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation. Diffuser is a linear sided prismatic lens of extruded acrylic for controlled light. Operating range from -40C to 40C.

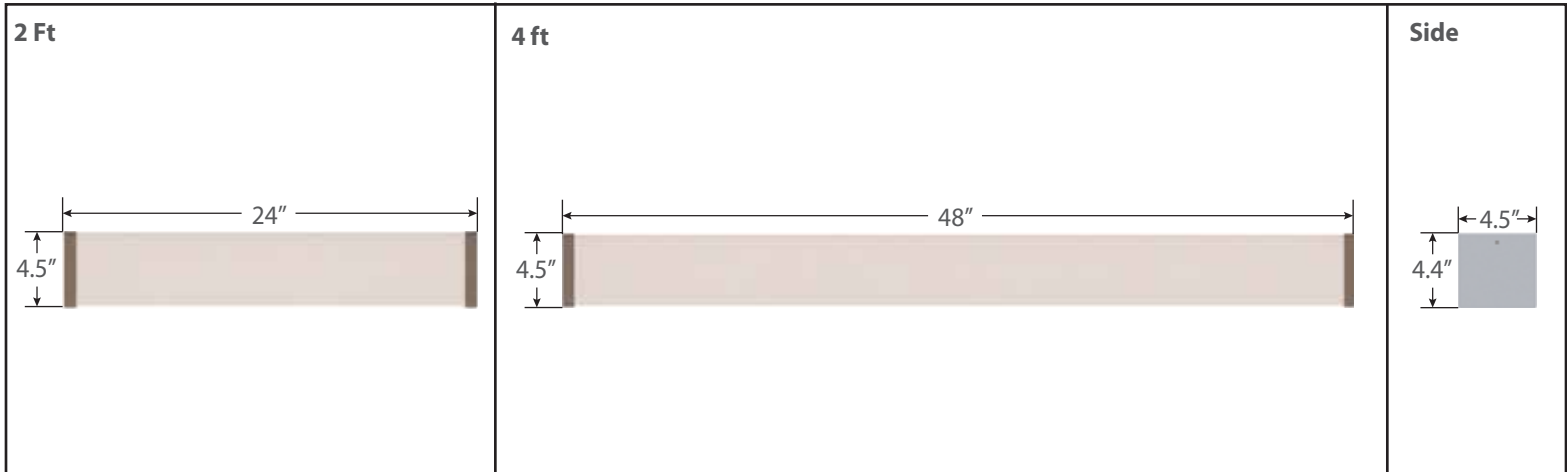

Size	Wattage	Initial Lumens (lm)	Efficacy (lm/W)
2ft	24W	2616	109
2ft	32W	3488	109
4ft	32W	3488	109
4ft	48W	5232	109
4ft	64W	6976	109



## ORDERING INFORMATION

BCM	Length	Wattage	Voltage(V)	Color Temp/CRI(CT80)	Options
2	2 Ft	24	1	30	Dimmer (Blank) None
4	4 Ft	32	2	35	SC SmartCor
		48	1D	40	Cable (Blank) None
		64	2D	50	WP6 6' Metal Clad Whip
				57	
				80	

EXAMPLE: BCM-4-64-1-4080/SC WP6

Dimensions and specifications subject to change without notice.

## DLC Listed Models

- BCM-2-32-XD-3080
- BCM-2-32-XD-4080
- BCM-2-32-XD-5080
- BCM-4-64-XD-3080
- BCM-4-64-XD-3580
- BCM-4-64-XD-4080
- BCM-4-64-XD-5080

## Notes:

- Contact factory for dimming options and any help needed in configuring the light for your application.